



The
Patent
Office

EP0001

11 06 1998

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP9 1RH

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

3/6/98

THIS PAGE BLANK (USPTO)

Official use

THE PATENT OFFICE

26 JUL 1995

27 JUL 1995 00000195

PAT 1 77 JC

15

Your reference

26 JUL 1995

9515352.4

Notes

Please type, or write in dark ink using CAPITAL letters. A prescribed fee is payable for a request for grant of a patent. For details, please contact the Patent Office (telephone 0171-438 4700).

Rule 16 of the Patents Rules 1990 is the main rule governing the completion and filing of this form.

Do not give trading styles, for example, 'Trading as XYZ company', nationality or former names, for example, 'formerly (known as) ABC Ltd' as these are not required.

Warning

After an application for a Patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977 and will inform the applicant if such prohibition or restriction is necessary. Applicants resident in the United Kingdom are also reminded that under Section 23, applications may not be filed abroad without written permission unless an application has been filed not less than 6 weeks previously in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction revoked.

The
Patent
Office

Request for grant of a Patent

Form 1/77

Patents Act 1977

1 Title of invention

1 Please give the title of the invention

A MAGNETIC FILTER DEVICE

2 Applicant's details

☐ First or only applicant

2a If you are applying as a corporate body please give:
Corporate name

Country (and State
of incorporation, if
appropriate)

2b If you are applying as an individual or one of a partnership please give in full:

Surname MARLOWE

Forenames JOBEY

2c In all cases, please give the following details:

Address 3, DOMINIC RD
CHILDWALL
LIVERPOOL

UK postcode L16 1JY
(if applicable)

Country UK

ADP number
(if known)

06 31 669 8001

2d, 2e and 2f: If there are further applicants please provide details on a separate sheet of paper.

☐ **Second applicant (if any)**

2d If you are applying as a corporate body please give:

Corporate name

N/A

Country (and State
of incorporation, if
appropriate)

2e If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

2f In all cases, please give the following details:

Address

N/A

UK postcode
(if applicable)

Country

ADP number
(if known)

3 An address for service in the United Kingdom must be supplied

Please mark correct box

3 Address for service details

3a Have you appointed an agent to deal with your application?

Yes ☐ No ☒ → go to 3b

↓
please give details below

Agent's name

Agent's address

Postcode

Agent's ADP
number

3b: If you have appointed an agent, all correspondence concerning your application will be sent to the agent's United Kingdom address.

3b If you have not appointed an agent please give a name and address in the United Kingdom to which all correspondence will be sent:

Name **JOBEY MARLOWE**

Address **3 DOMINIC RD
CHILDWALL
LIVERPOOL**

Postcode **L16 1J4**

ADP number
(if known)

Daytime telephone **0151 734 2042**
number (if available)

11

Please mark correct box

5 Are you claiming that this application be treated as having been filed on the date of filing of an earlier application?

please give details below

 filing date

day	month	year
1	1	1900
2	2	1901
3	3	1902
4	4	1903
5	5	1904
6	6	1905
7	7	1906
8	8	1907
9	9	1908
10	10	1909
11	11	1910
12	12	1911
13	1	1912
14	2	1913
15	3	1914
16	4	1915
17	5	1916
18	6	1917
19	7	1918
20	8	1919
21	9	1920
22	10	1921
23	11	1922
24	12	1923
25	1	1924
26	2	1925
27	3	1926
28	4	1927
29	5	1928
30	6	1929
31	7	1930
32	8	1931
33	9	1932
34	10	1933
35	11	1934
36	12	1935
37	1	1936
38	2	1937
39	3	1938
40	4	1939
41	5	1940
42	6	1941
43	7	1942
44	8	1943
45	9	1944
46	10	1945
47	11	1946
48	12	1947
49	1	1948
50	2	1949
51	3	1950
52	4	1951
53	5	1952
54	6	1953
55	7	1954
56	8	1955
57	9	1956
58	10	1957
59	11	1958
60	12	1959
61	1	1960
62	2	1961
63	3	1962
64	4	1963
65	5	1964
66	6	1965
67	7	1966
68	8	1967
69	9	1968
70	10	1969
71	11	1970
72	12	1971
73	1	1972
74	2	1973
75	3	1974
76	4	1975
77	5	1976
78	6	1977
79	7	1978
80	8	1979
81	9	1980
82	10	1981
83	11	1982
84	12	1983
85	1	1984
86	2	1985
87	3	1986
88	4	1987
89	5	1988
90	6	1989
91	7	1990
92	8	1991
93	9	1992
94	10	1993
95	11	1994
96	12	1995
97	1	1996
98	2	1997
99	3	1998
100	4	1999
101	5	2000
102	6	2001
103	7	2002
104	8	2003
105	9	2004
106	10	2005
107	11	2006
108	12	2007
109	1	2008
110	2	2009
111	3	2010
112	4	2011
113	5	2012
114	6	2013
115	7	2014
116	8	2015
117	9	2016
118	10	2017
119	11	2018
120	12	2019
121	1	2020
122	2	2021
123	3	2022
124	4	2023
125	5	2024

Please mark correct box

15(4) (Divisional) ☐ 8(3) ☐ 12(6) ☐ 37(4) ☐

6 If you are declaring priority from a PCT Application please enter 'PCT' as the country and enter the country code (for example, GB) as part of the application number.

Please give the date in all number format, for example, 31/05/90 for 31 May 1990.

Country of filing	Priority application number (if known)	Filing date (day, month, year)
N/A		

The answer must be 'No' if:
any applicant is not an inventor
there is an inventor who is not an
applicant, or
any applicant is a corporate body.

⑤ Please supply duplicates of
claim(s), abstract, description and
drawing(s).

Please mark correct box(es)

④ You or your appointed agent (see
Rule 90 of the Patents Rules 1990)
must sign this request.

Please sign here →

A completed fee sheet should
preferably accompany the fee.

Inventorship

7 Are you (the applicant or applicants) the sole inventor or the joint inventors?

Please mark correct box
Yes ☐ No ☒ → A Statement of Inventorship on Patents
Form 7/77 will need to be filed (see Rule 15).

⑤ Checklist

8a Please fill in the number of sheets for each of the following types of
document contained in this application.

Continuation sheets for this Patents Form 1/77

Claim(s)

Description

Abstract

Drawing(s)

7

3

8b Which of the following documents also accompanies the application?

Priority documents (please state how many)

Translation(s) of Priority documents (please state how many)

Patents Form 7/77 - Statement of Inventorship and Right to Grant
(please state how many)

Patents Form 9/77 - Preliminary Examination/Search

Patents Form 10/77 - Request for Substantive Examination

⑥ Request

I/we request the grant of a patent on the basis of this application.

Signed

Date 24 7 95
(day month year)

**Please return the completed form, attachments and duplicates
where requested, together with the prescribed fee to:**

☐ The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent
NP9 1RH

OR

☐ The Comptroller
The Patent Office
25 Southampton Buildings
London
WC2A 1AY

17

A MAGNETIC FILTER DEVICE

- Description -

The present invention relates to a magnetic filter device for filtering ferromagnetic material from a fluid in which said material is suspended.

Fluid such as engine oil which circulates in an engine and/or gearbox, and hydraulic fluid which circulates in hydraulic systems, tends to accumulate ferrous material from metallic surfaces which are lubricated by the fluid. Such particulate material in suspension is liable to accelerate wear of these surfaces and thereby generate even more ferrous matter.

Conventional filters fail to filter out a substantial amount of ferrous material from the fluid, which material, is liable to cause damage to an engine and/or gearbox or hydraulic system. In addition, as there is no indication of the quantity of ferrous material in the fluid, the fluid conventionally, is changed after the engine or hydraulic system has been run for a certain period of time, in order to limit possible damage.

A magnetic filter device for filtering ferromagnetic material from a fluid in which said material is suspended, has an inlet means and an outlet means which are isolated from each other within the device. A pair of annular plates are attached to either side of an annular magnet of smaller diameter, which sides are of opposing magnetic polarity to thus generate a magnetic field between the pair of plates. Each plate is recessed to form radially extending pole pieces. The plates are oriented with respect to each other so that the pole pieces and recesses are axially aligned. The magnetic flux distributions thus created, divert ferromagnetic material in the fluid towards the regions defined by opposite pairs of pole pieces.

In use, the magnetic filter device can be inserted between a containing means or engine, and a conventional filter or pump, so as to enhance the collection of ferromagnetic material from the circulating fluid.

In accordance with one aspect of the present invention, a magnetic filter device for filtering ferromagnetic material from a fluid in which said material is suspended, comprises a magnet and a pair of metal plates, said magnet having faces of opposite magnetic polarity, said plates being disposed in abutment with said faces respectively, each plate having a plurality of recesses about an outer perimeter of the plate to form radially extending magnetic pole pieces, which extend beyond an outer perimeter of the magnet faces, said plates being oriented so that the recesses and pole pieces on one plate are axially aligned with those recesses and pole pieces on the other plate, wherein axially opposite recesses define passage means for said fluid and also regions from which ferromagnetic material is repelled, and wherein said pole pieces define regions to which ferromagnetic material is attracted and retained.

Preferably, the magnetic filter device is further provided with a distribution plate having a plurality of apertures which are axially alignable with said recesses, said apertures being the only passage means of fluid to said metal plates.

It is further preferred that the distribution plate, the magnet and said metal plates are each provided with a central hole which is adapted to receive a tube through which fluid can pass, said tube providing means for isolating, within the device, fluid passage in the tube from fluid flow through the recesses.

Advantageously, each recess and an outer edge of each pole piece is further provided with one or a plurality of slots.

Preferably, the outer edges of axially facing pole pieces are curved towards one another.

It is preferred that means are provided for ensuring that said recesses and said apertures are maintained in axial alignment.

The distribution plate is advantageously made of a non-ferromagnetic material. This would discourage any collection of ferromagnetic material thereon.

The magnet is advantageously made of a material which will generate a magnetic field between the metal plates which is strong enough to attract ferromagnetic material from fluid passing therebetween.

78

The metal plate which is impinged first by fluid flow through the device, is advantageously thicker than the other metal plate through which fluid leaves the device.

Preferably, an outer face of the tube is provided with a recess which can receive retaining means which is able to keep the distribution plate in abutment with the axially closer of said metal plates.

Advantageously, a housing is further provided, which is adapted at one end to be received by a containing means of said fluid, said containing means having an input means and an output means, the housing being adapted at the other end to receive a filter of known type, an output of which known filter is continuous with the tube in the magnetic filter device and also the input means to the containing means, said output means from the containing means being continuous with the apertures in the distribution plate and the recesses in the metal plates.

In a further embodiment, the magnetic filter device is provided with two distribution plates disposed either side of each of the metal plates, each distribution plate having a plurality of apertures which are axially alignable with said recesses, said apertures being the only passage means of fluid to said metal plates, the apertures in both distribution plates providing inlet and outlet means for bi-directional axial flow of fluid.

In accordance with a further aspect of the present invention, there is provided a magnetic filter device for filtering ferromagnetic material from a fluid in which said material is suspended, which comprises a known filter, a magnet and a pair of metal plates, said magnet having faces of opposite magnetic polarity, said plates being disposed in abutment with said faces respectively, each plate having a plurality of recesses about an outer perimeter of the plate to form radially extending magnetic pole pieces, which extend beyond an outer perimeter of the magnet faces, said plates being oriented so that the recesses and pole pieces on one plate are axially aligned with those recesses and pole pieces on the other plate, wherein axially opposite recesses define passage means for said fluid and also regions from which ferromagnetic material is

repelled, and wherein said pole pieces define regions to which ferromagnetic material is attracted and retained, said known filter having passage means for said fluid which is continuous with fluid passage through said recesses.

A specific embodiment of the present invention will now be described with reference to the accompanying drawings, in which:

Fig. 1 is a cross-section through a magnetic filter device in accordance with one aspect of the present invention;

Fig. 2 is an exploded perspective view of the device in fig.1;

Fig. 3 is a top view of the distribution plate in figs. 1 & 2,

Fig. 4 is a top view of one of the metal plates in the device, and

Fig. 5 is a schematic diagram illustrating one application of the device in figs. 1 to 4.

A magnetic filter device 1, as shown in figs.1 & 2, for filtering ferromagnetic material (not shown) from a fluid (not shown) in which said material is suspended, comprises a magnet 2 having two faces 3, 4 of opposite magnetic polarity, against which faces 3, 4, abut metal plates 5, 6, respectively. The plates 5, 6 are provided with a plurality of recesses 7, 8 respectively, in outer circumferential edges 9, 10 of said plates 5, 6 so as to form pole pieces 11, 12 as shown in figs. 2 and 4. Equal numbers of such pole pieces, 11, 12 are formed in each plate 5, 6, and the latter oriented so that the pole pieces 11 and recesses 7 of the plate 5, are axially aligned with the respective pole pieces 12 and recesses 8 of the plate 6. Axially displaced pairs of pole pieces 11, 12 have opposite magnetic polarity by virtue of their respective locations on the faces 3, 4 of the magnet 2. They overlap an outer edge 13 of the magnet 2 to define radially extending collecting regions 14 in which ferromagnetic particles subject to the magnetic fields generated therein, can be retained. The ends of each pair of pole pieces 11, 12 are curved towards each other to further enhance the strength and distribution of the magnetic fields. Furthermore, because each recess 7, 8 is flanked radially by

portions of metal of like polarity, ferromagnetic material is repelled towards the collecting regions 14 and also away from the path of fluid flow.

Each pole piece 11, 12 and each recess 7, 8 is further provided with a slot 15. Each slot 15 defines adjacent regions of like polarity in which a strongly repelling magnetic field is thus generated. Such fields further promote the retention of ferromagnetic material to the regions 14 between facing pole pieces.

Apertures 16, 17 centrally disposed in plates 5, 6 axially align with a central aperture 18 in the magnet 2 to form a channel 19 in the device 1, in which a central tube 20 is disposed. The tube 20 extends beyond the collective thicknesses of the plates 5, 6 and the magnet 2.

A distribution plate 21, as shown in fig. 3, has a central aperture 22 which enables the distribution plate 21 to be threaded over an end 23 of the central tube 20, so as to be disposed adjacent to the metal plate 5. The plate 21 is further provided with apertures 24 equal in number to the recesses 7, 8 in each of the plates 5, 6. The distribution plate 21 is disposed about the tube 20 so that the apertures 24 are axially aligned with the recesses 7, 8 in the metal plates 5, 6. The plates 5, 6 are each provided with flats 25, 26 in the apertures 16, 17 respectively, and the aperture 22 of the distribution plate 21 is also provided with a flat 27 of similar size. In the orientation described above where the apertures 24 and the recesses 7, 8 are in axial alignment, the flats 25, 26 and 27 are also axially aligned. The tube 20 is provided with a flattened region 28 on an outer face 30 against which the flats 25, 26 and 27 of the plates 5, 6 and 21 are disposed in order to maintain the above-mentioned orientation when the magnetic filter device 1 is assembled.

The distribution plate 21 has a flange portion 29 about the central aperture 22. The outer face 30 of the central tube 20 is further provided with an annular recess 31 which is adapted to receive a circlip 32 which abuts the flange portion 29 when the distribution plate 21 is in abutment with the metal plate 5.

The distribution plate 21 may be circumferentially sealed against a housing (not shown) to ensure that only fluid which flows through apertures 24 in the distribution plate 21 passes through to the recesses 7, 8.

In one example of an application of the magnetic filter device 1, the latter is removeably disposed between a known containing means 33 for fluid 34 to be filtered in a system in use (not shown), and a known filter unit 35, as shown in fig. 5.

The known filter unit 35 is attachable to the containing means 33 by means of a bolt 36 which enters a lower face of the filter unit 35, passes through its centre, continues out through an upper portion of the unit 35 and screws into a part of the containing means 33. A spring 37 provided between a block of filter material 38 and a base of the filter unit 35 is further compressed to accommodate the insertion of the magnetic filter device 1 between the containing means 33 and the filter unit 35.

The distribution plate 21 is sealed against the filter unit 35 by annular sealing means 39. The central tube 20 is sealed against the containing means 33 and a surface 40 of the known filter unit 35 by sealing means 41 and 42 respectively.

Fluid 34 exits the containing means 33 through an outlet port 43. It flows towards the distribution plate 21 and thus through axially coincident apertures 24 and recesses 7, 8 in the distribution plate 21 and the plates 5, 6 respectively. From the magnetic filter device 1, fluid enters the known filter unit 35 and flows to the filter material 38, in which other particles in suspension can be retained. Fluid exits the filter material 38 and flows through a central passage 44 which is continuous with the central tube 20 of the magnetic filter device 1. From the central tube 20 of the device 1, fluid re-enters the containing means 33 through an input port 45. It is then recirculated around the system in use before its return to the outlet port 43. More ferromagnetic material is retained with the increased frequency of circulation of fluid through the magnetic filter device 1.

In the event of blockage of the filter material 38, a pressure relief valve 46 allows fluid to bypass the filter material 38 and proceed through to the central passage 44. Material retained in the filter material 38 up to this point may then be


20

disadvantageously washed back into the circulation. However, since fluid input into the magnetic filter device 1 is isolated from fluid output, any particles collected in the magnetic filter device 1 will be retained in such an event.

In such an arrangement, the magnetic filter device 1, can act as a convenient check point for the amount of wear on engine and/or gearbox components or hydraulic system, and therefore enhance their safety and efficiency.

In a further embodiment, the magnetic filter device can be oriented with respect to a known filter unit so as to have the distribution plate 21 facing the direction of fluid flow.

In a further embodiment, the filter device can be an integral member of a known filter unit.

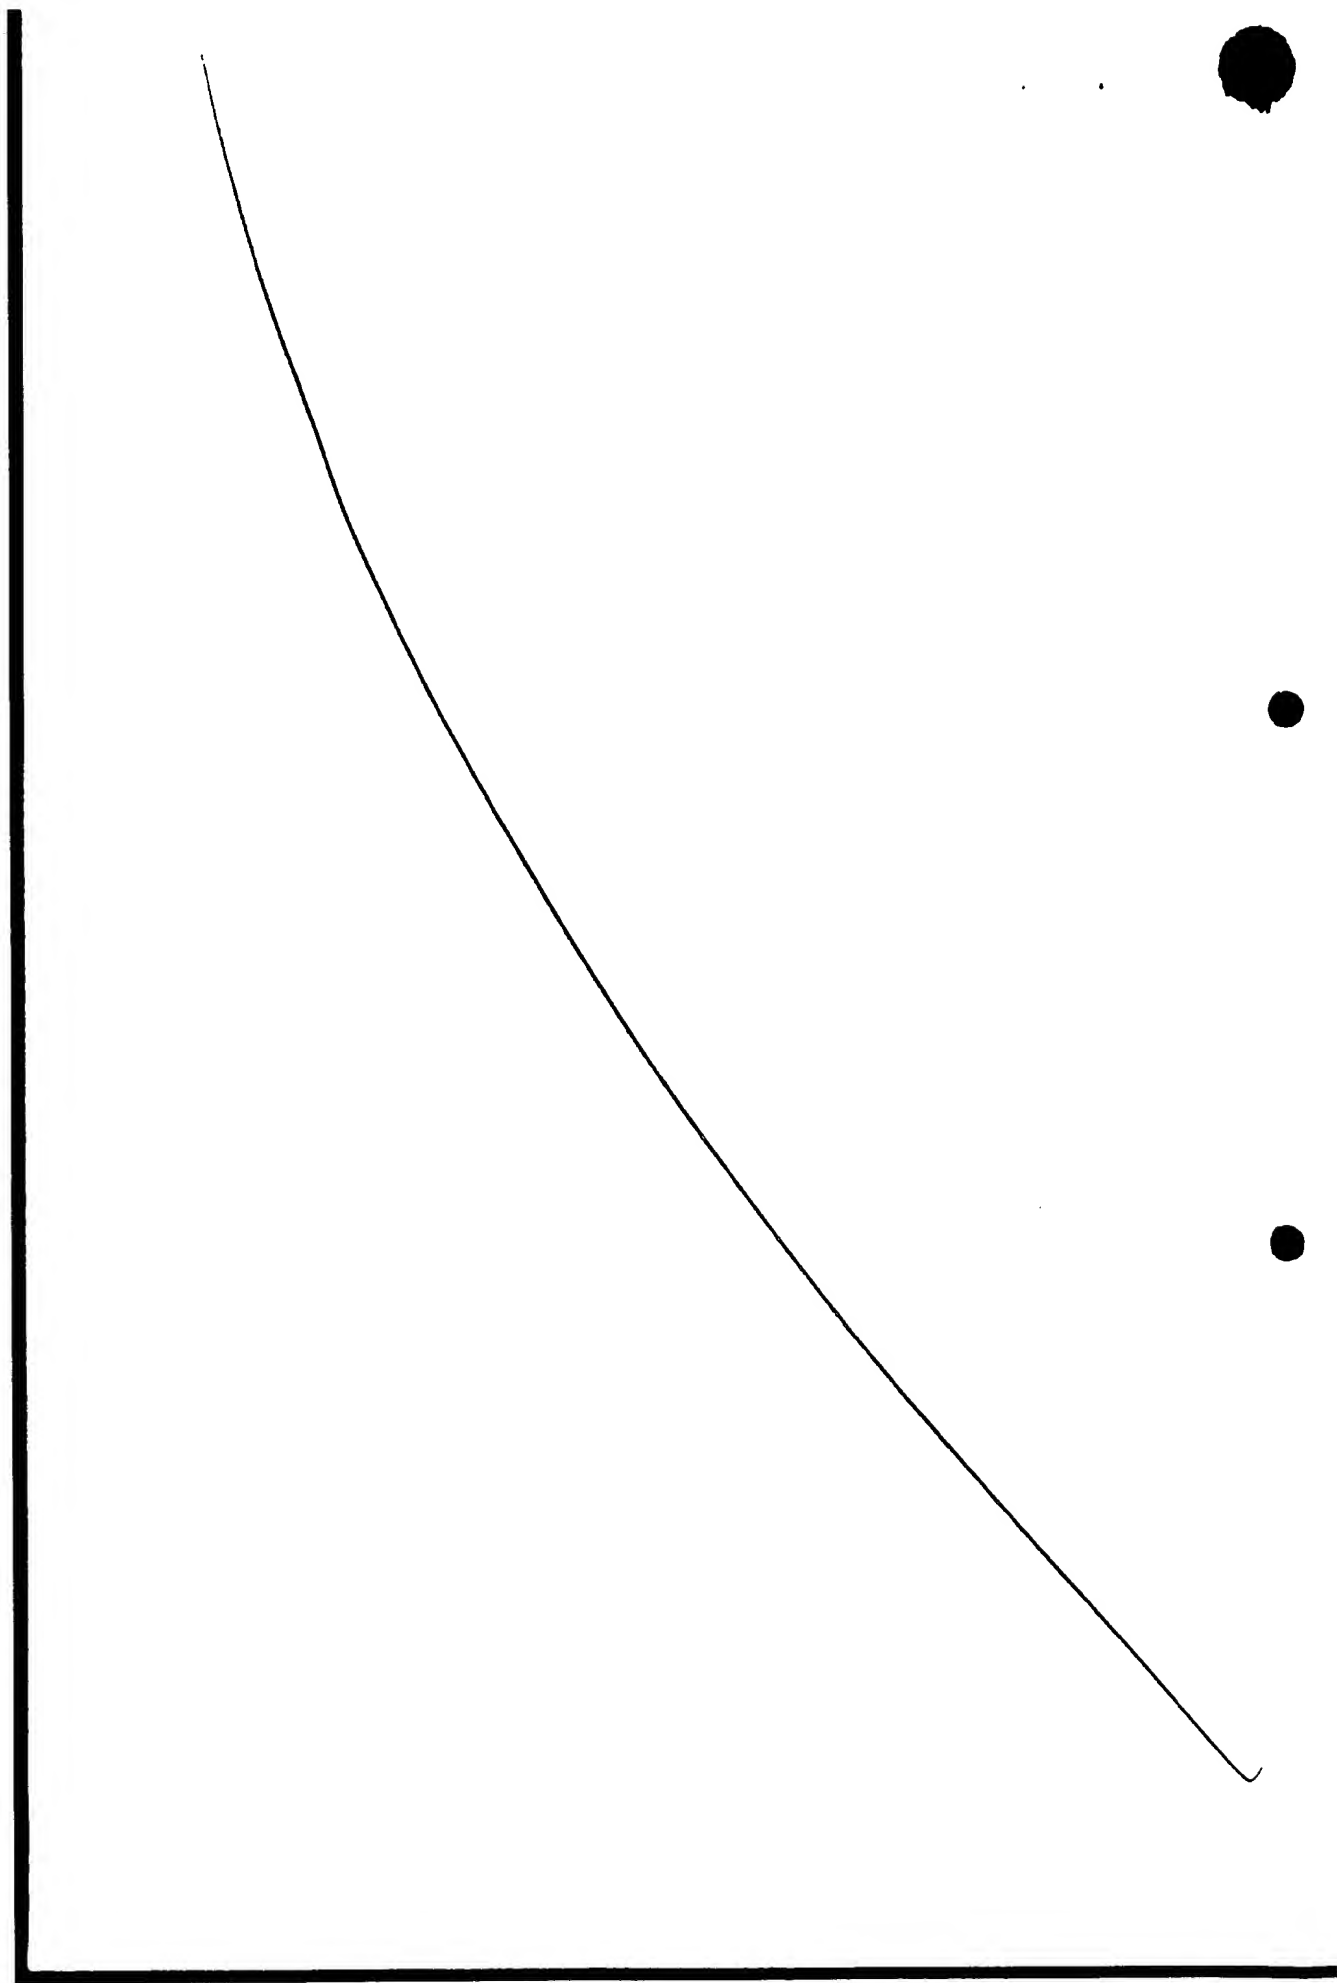

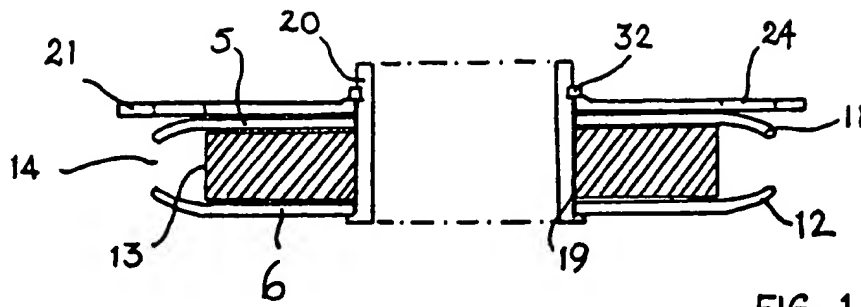


FIG. 1

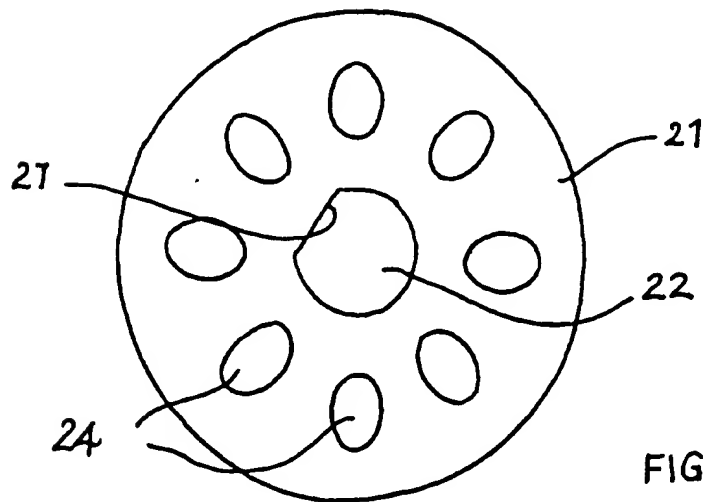


FIG. 3

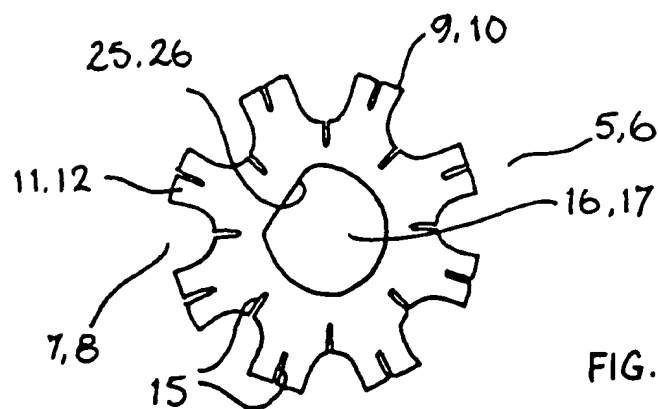
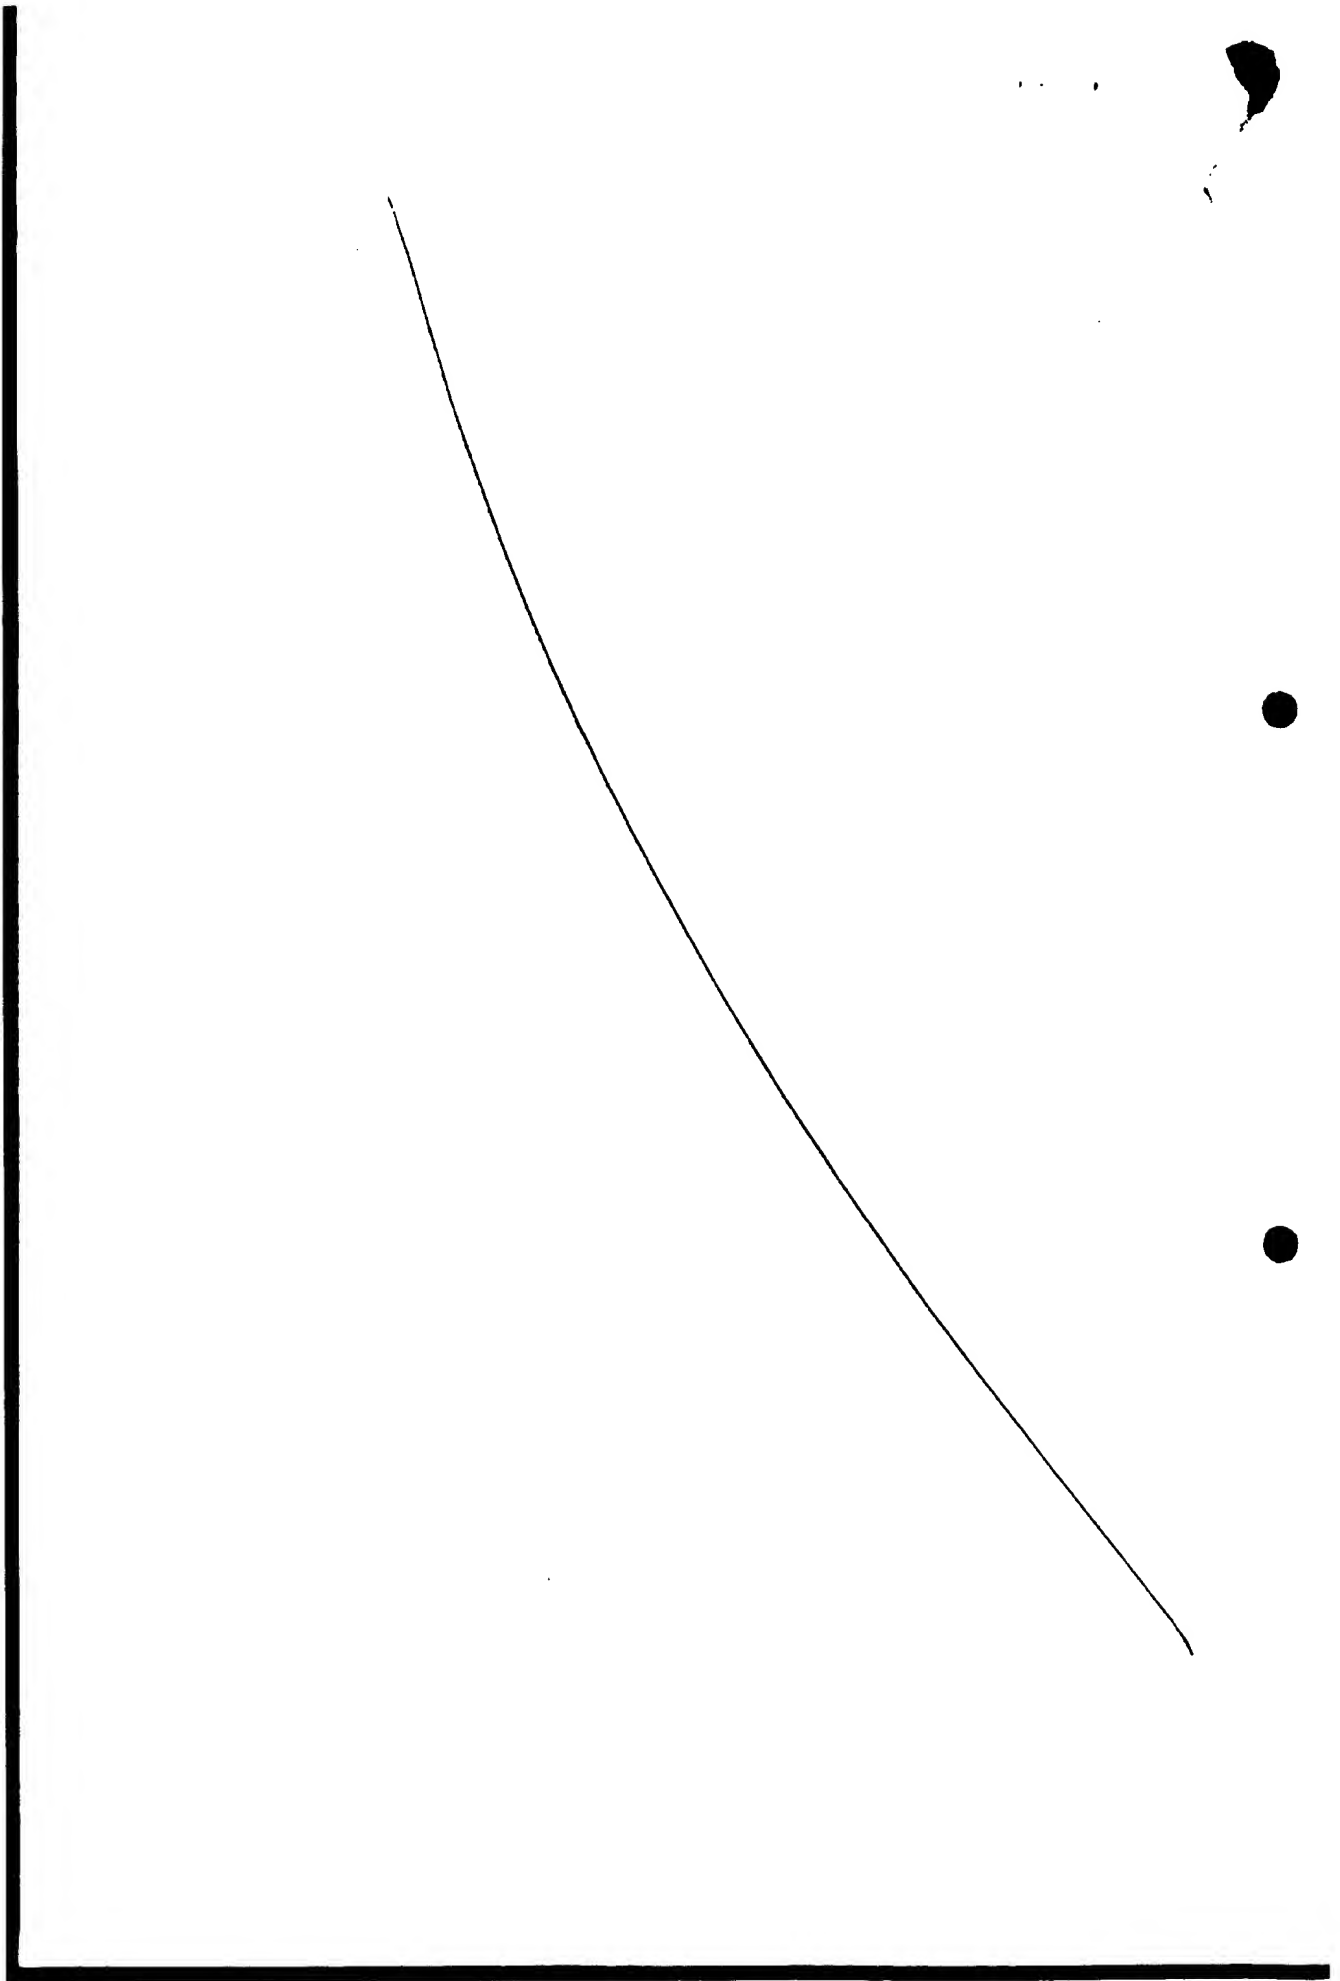


FIG. 4



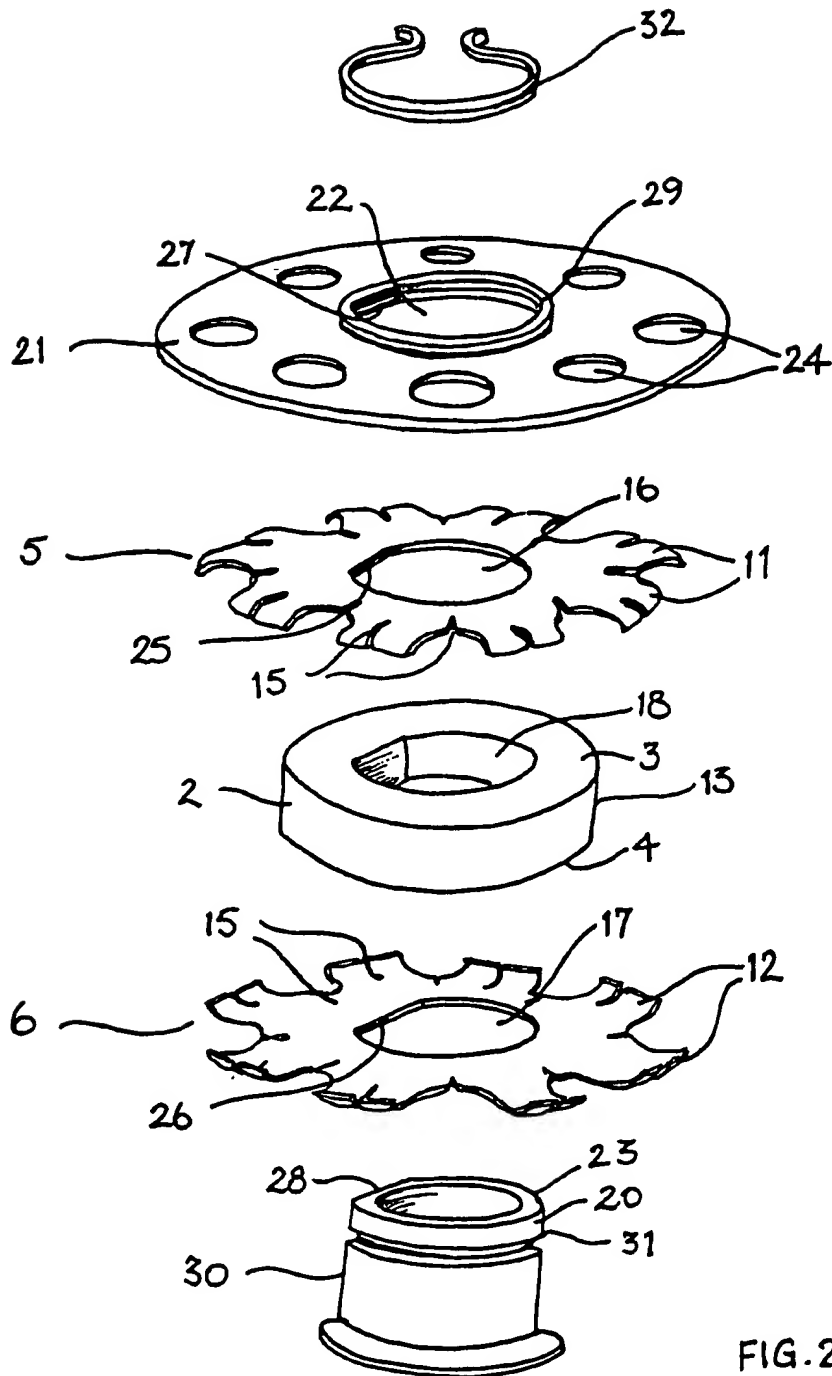
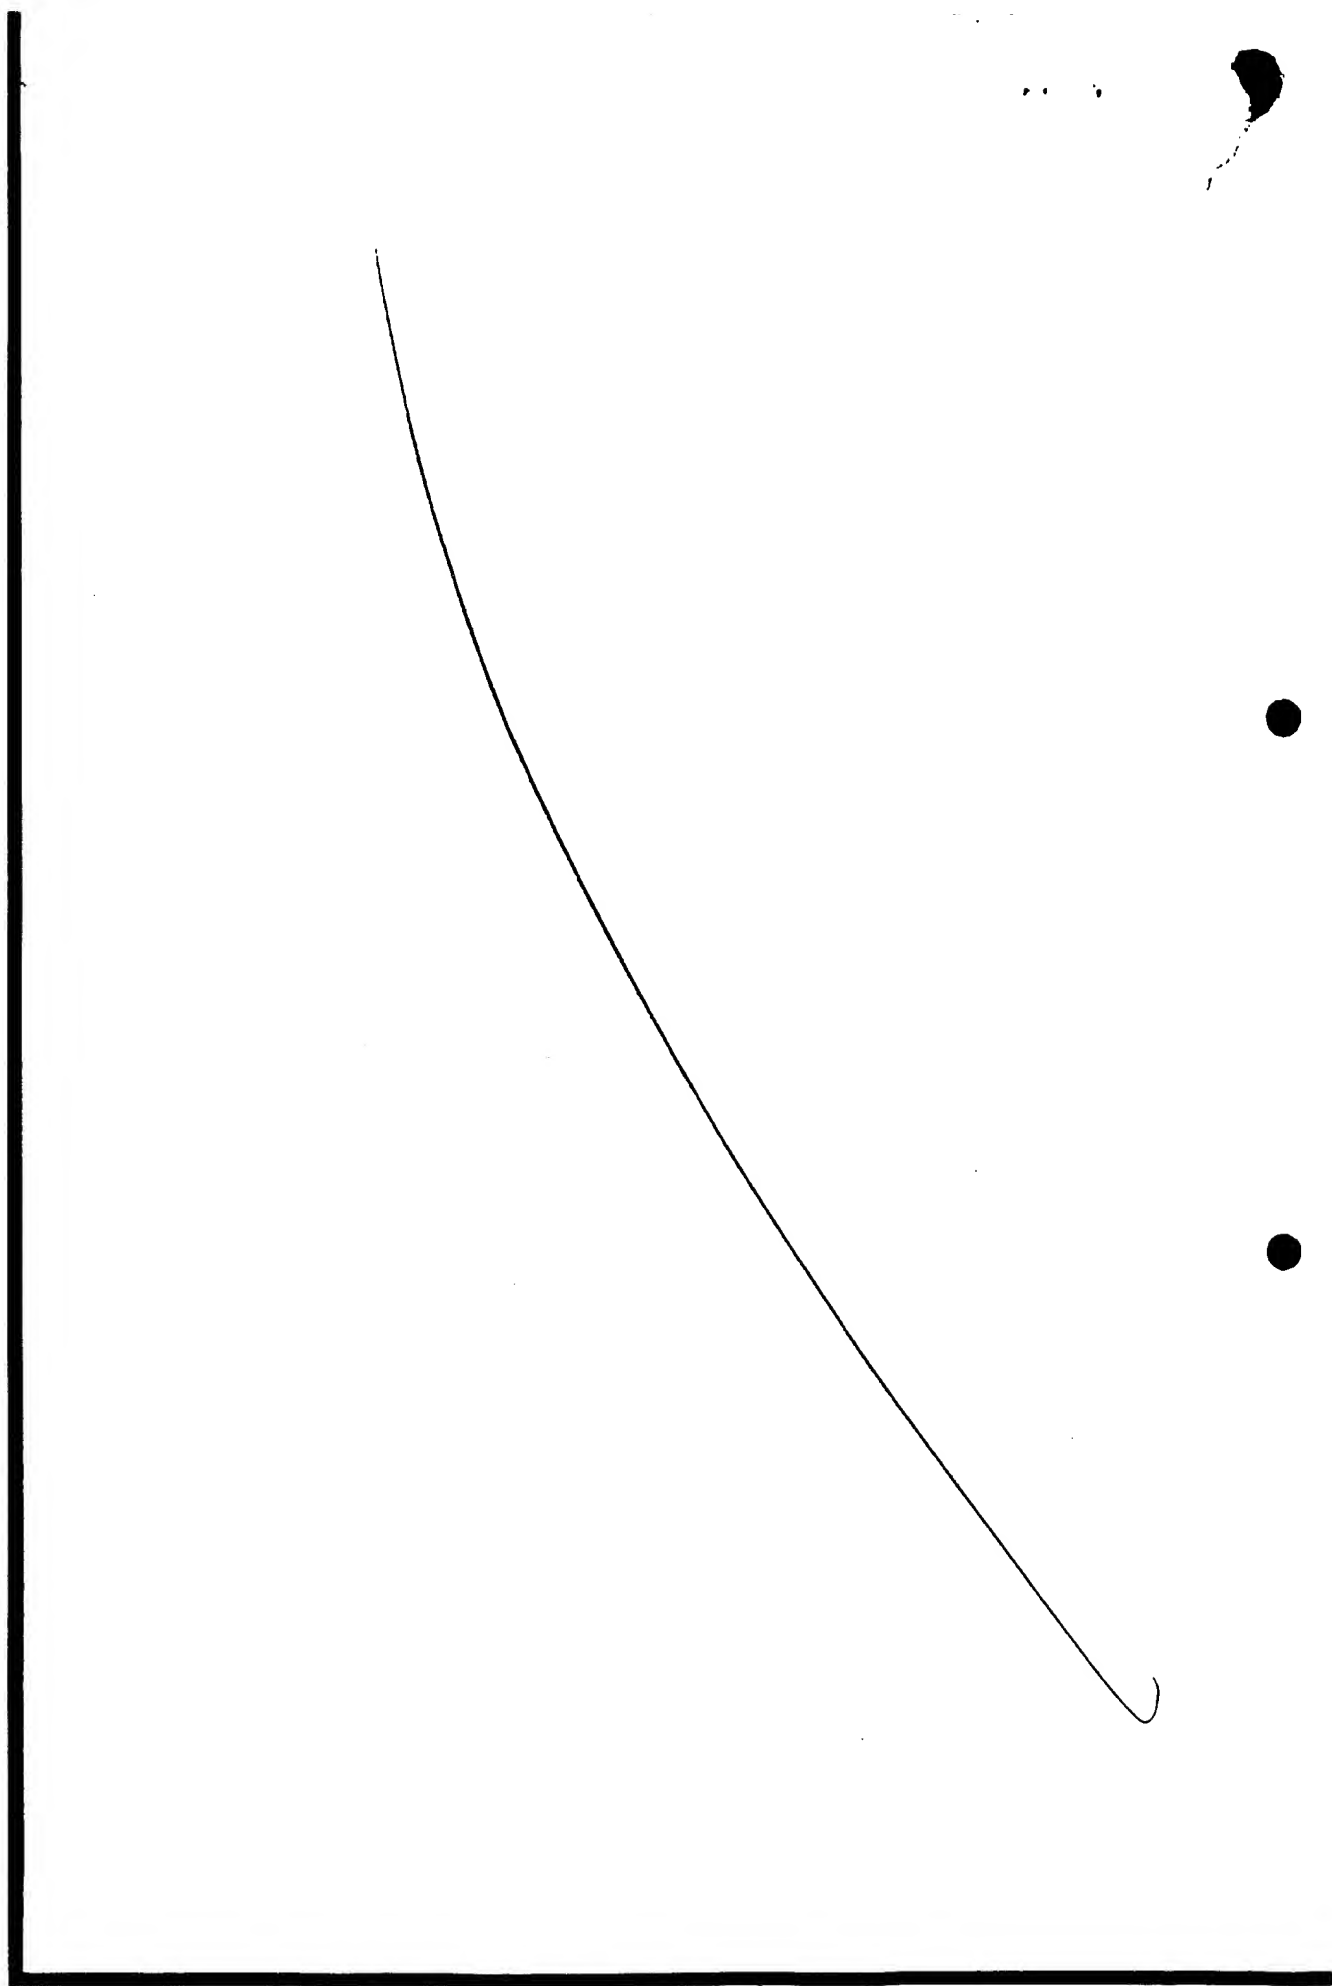


FIG. 2



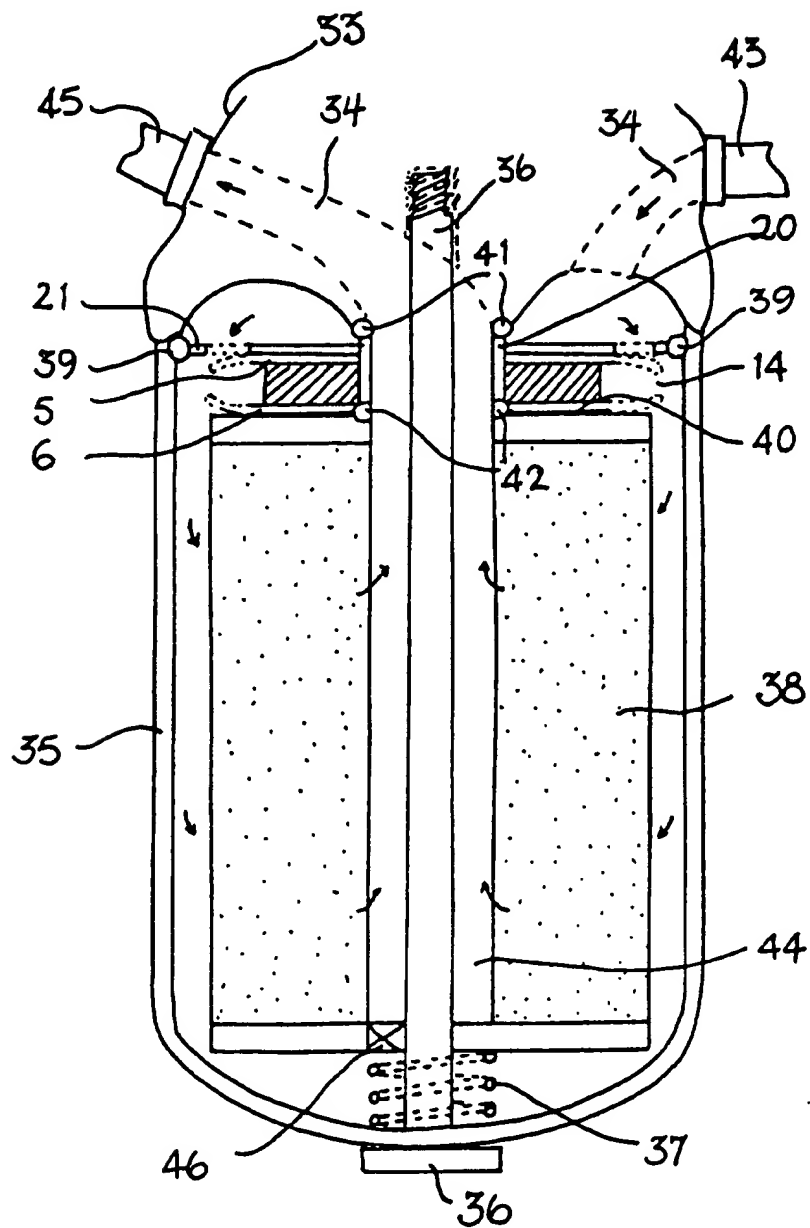


FIG. 5

